


GS-2032

Electric Self-Propelled Scissor Lift

Genie GS-2032

A stable, reliable
and easy to operate
lift with a built-in
platform extension.

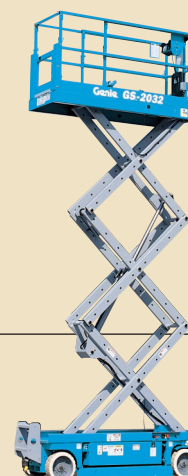

Genie Australia
GENIE MEANS MORE THAN LIFTING

GS-2032

- The solid steel deck platform has a **slip-resistant surface**.
- Heavy duty square steel guardrails **maximise durability**.
- **Lubrication-free, service-free pivot points**.
- **Built-in lanyard attachment points**.
- Weather resistant, impact resistant, injection-moulded **Joystick Carrier / Controller box** operates from the platform or the ground.
- **Low noise level** allows operation in quiet work environments.
- High angle steering provides **excellent manoeuvrability**.
- Swing-out battery box and power

module allow **easy access to componentry**.

- Variable speed motor **extends battery and motor life** by using only the energy needed to do the required work.
- On-board troubleshooting diagnostics **notify the operators of possible fault conditions**.

Standard Features


- GS-2032 has 7.9 m (26 ft) working height
- 1 m (39 in) roll-out platform extension
- Compact 81 cm (32 in) width
- 363 kg (800 lb) lift capacity
- Proportional controls for lift and drive functions
- Automatic 25 amp battery charger
- Manual platform lowering valve
- Emergency stop switches at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- Manual brake release
- Pothole guards
- Non-marking tyres
- AC wiring to platform
- Tilt sensor with an audible alarm
- Beeper horn
- Hour meter

Options and Accessories

- Motion alarm
- Power inverter
- Platform swing gate
- Air line to platform
- EE rating
- Dual flashing beacon
- Automotive horn
- Folding guardrails with platform swing gate
- Maintenance-free batteries
- Pipe cradle

Standards Compliance

- ANSI/SIA A92.6
- CE compliance option
- AS 1418.10
- CSA CAN3-B354.2-M82

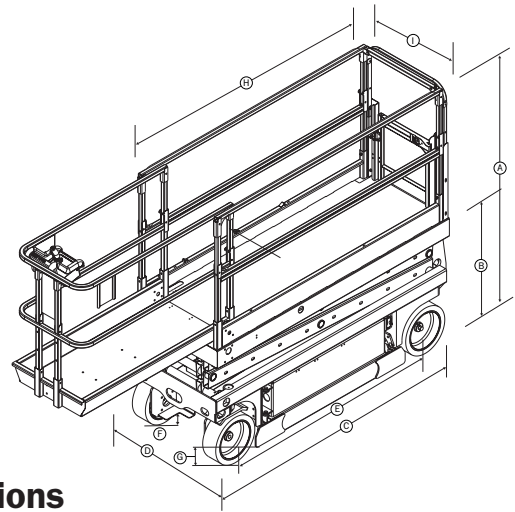

Specifications

Model	GS-2032	
	Metric	US
Working height*	8.1 m	26 ft
Platform height	6.1 m	20 ft
Sliding rail design (standard)		
Ⓐ Height stowed, ANSI, CSA	2 m	78 in
Height stowed, CE	2.11 m	83 in
Height stowed, rails lowered	1.93 m	76 in
Fold down rail design (optional)		
Height stowed	2.11 m	83 in
Height stowed, rails folded	1.73 m	68 in
Ⓑ Platform height - stowed	98 cm	38 1/2 in
Ⓒ Length - stowed	2.44 m	96 in
Ⓓ Width	81 cm	32 in
Ⓔ Wheelbase	1.85 m	73 in
Ⓕ Ground clearance - at machine centre	10 cm	4 in
Ⓖ Ground clearance - pothole guards deployed	2 cm	7/8 in
Ⓗ Platform length	2.26 m	89 in
Ⓛ Platform width	79 cm	31 in
Platform length extended	3.25 m	128 in
Guardrail height		
ANSI, CSA	1 m	39 in
CE	1.1 m	43 in
Toeboard height	15 cm	6 in
Lift capacity	363 kg	800 lb
Extension deck lift capacity	113 kg	250 lb
Turning radius outside	2.34 m	92 in
Turning radius inside	zero	
Power source	24V (4 6V 245AH batteries)	
Drive speed - stowed	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph
Raise/lower speed	30/26 sec	
Controls	24V DC proportional	
Tyres (solid rubber)	38 x 13 x 28 cm	15 x 5 x 11 in
Gradeability	30%	30%
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Weight	1,953 kg	4,306 lb

*The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

Distributed By:

Genie Industries™

GENIE AUSTRALIA

591 Boundary Road, Darra Qld 4076
 PO Box 394, Richlands Qld 4077
 Telephone **07 3375 1660**
 Toll Free in Australia **1800 331 660**
 Fax 07 3375 1002
www.genielift.com

GENIE UNITED STATES

18340 NE 76th Street
 P.O. Box 97030
 Redmond, Washington 98073-9730
 Telephone **425 881 1800**
 Toll Free in USA/Canada **800 536 1800**
 Fax 425 883 3475
www.genielift.com